MINI EXCAVATORS

Standard Features

Hydraulic

- Foot Operated PTO Control
- PTO Piping Boom Cylinder Protection

Circuit Identification

- **Operator's Station**
- Canopy
- PVC Seat
- Integrated Seatbelt Anti -Slip Floor Pads
- Lockable Tool Box **Attachment**

Boom Light

Track

- Rubber Crawler Expandable Track Frame
- Other Essential Tool Kit

Optional Extras


Operator's Station

ROPS Frame

Attachment

Half Hitch Other

Breaker

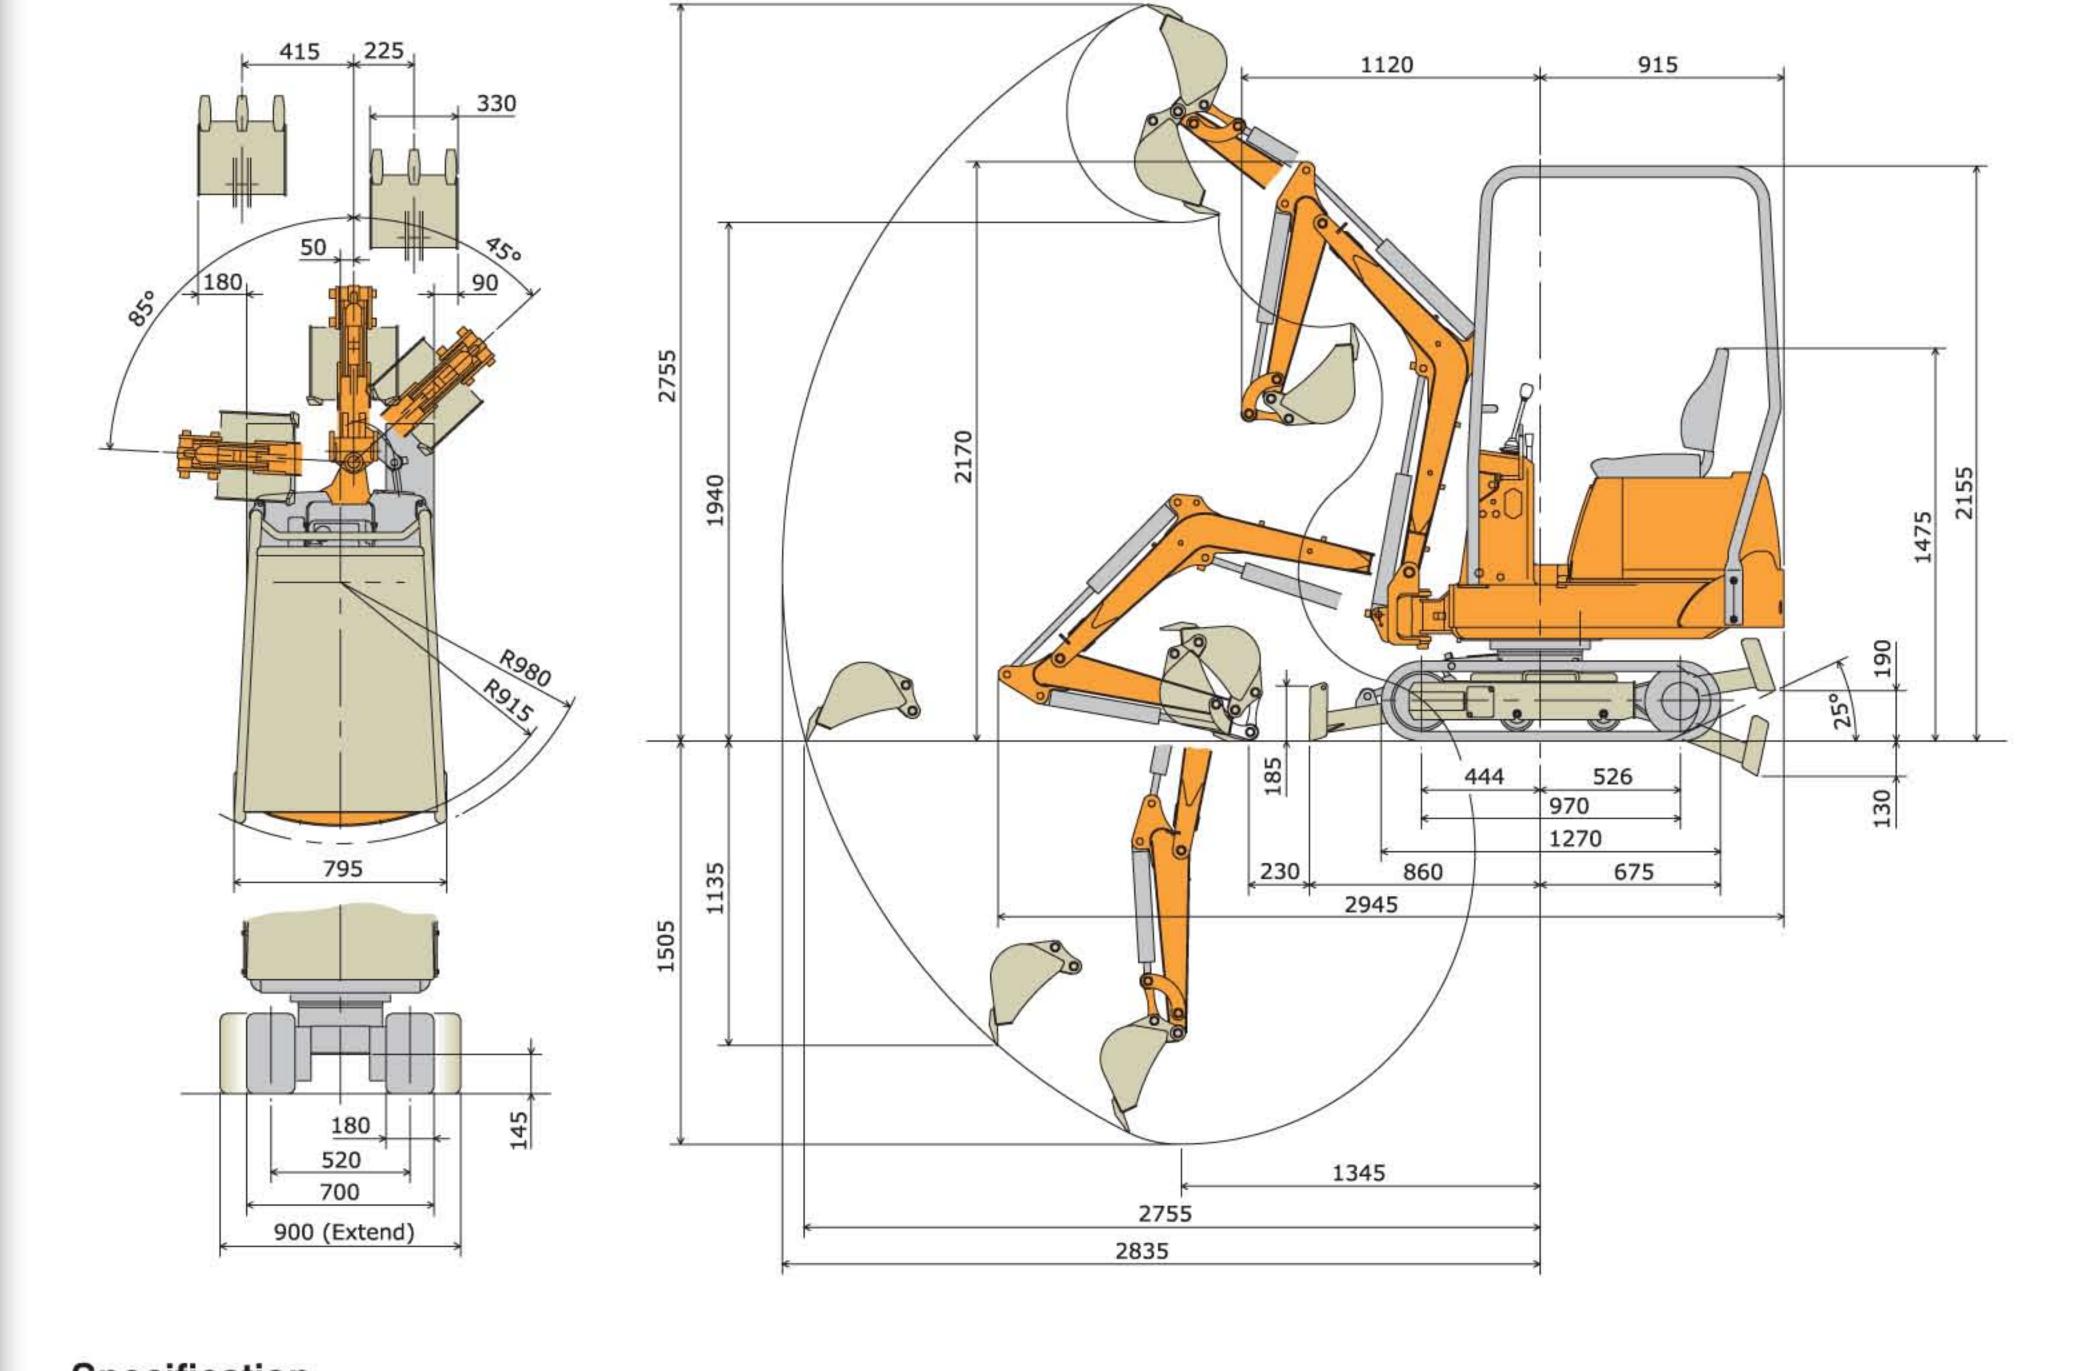

Specification Machine weight (Roll Bar - Rubber Tracks / Canopy - Rubber Tracks) 760 / 835 kg Dimension (length / width / height) 2945 / 795-900 / 2155 700-900 / 185 Dozer blade dimensions (width / height) mm Bucket (capacity / width), std. ISO7451 m³/mm 0.022 / 350 Noise Level LwA / LpA 93 / 80 KUBOTA D722 Displacement 7.4kW / 10ps / 2000rpm Rated power Fuel tank capacity litres 1505 Working Max. digging depth mm Range 2755 Max. digging height mm 1940 Max. dumping height mm 1135 Max. vertical digging depth mm 2835 Max. digging radius mm 2755 Max. reach at ground mm 1120 Min. turning radius front mm 980 Rear turning radius mm 825 Min. turning radius swing mm L85 / R45 Boom swing angle (L / R) degrees Max. digging power Bucket / Arm 8.3 / 5.9 kN Performance km/h 2.0 / -Travelling speed (low / high) min-1 8.5 Slew speed Gear 2 Hydraulic Type Pump 200 litres/min Oil flow quantity 10.2 / 10.2 litres/min 20.4 Oil flow quantity Main relief pressure MPa 16.2 / 16.2

Hyd. tank capacity					litres	13	
fting Capaci	ty (kgf) Standard	d Arm, Canopy, N	Narrow gauge				
Lifting point Height (m)	Lifting point radius (1.5m)			Lifting point max radius			
	Over-front		Over-side	Over-front		Over-side	m
	Blade Down	Blade Up	O VOI GIGO	Blade Down	Blade Up	Over olde	3131
1.5	231	231	114	208	120	54	2.2
0.0	432	194	81	226	41	100	2.3
-1.0	218	203	88	218	203	88	1.5



www.hanixeurope.com



ÖZKAN ÖZTÜRK İş Makinaları Yedek Parça & Servis San. ve Tic. Ltd. Şti.

E-mail. ozkanozturk@ozkanozturk.com

129/3 SOKAK NO:3 4 SANAYİ SİTESİ | BORNOVA/İZMİR Tel. 0 232 375 43 01 PBX / 375 43 01 Fax. 0 232 375 62 10

We are constantly endeavouring to improve the performance of our Mini Excavator range.

We reserve the right to make alterations from time to time, and machine details may differ from those shown in this brochure.


Copyright: © Hanix Europe Ltd H08B 10/10 Exceptional product reliability and integrity ~ the ultimate in Japanese craftsmanship

HO8B Tough and versatile micro-excavator that's easy to transport and simple to operate



Environment Friendly

- Exceptional power to weight ratio reduces fuel consumption and cuts exhaust emissions.
- Easy to transport and crosses surfaces with minimum ground
- compaction. Corrosion-free fibreglass body.
- Engine bay fitted with high quality sound proofing to reduce noise pollution.

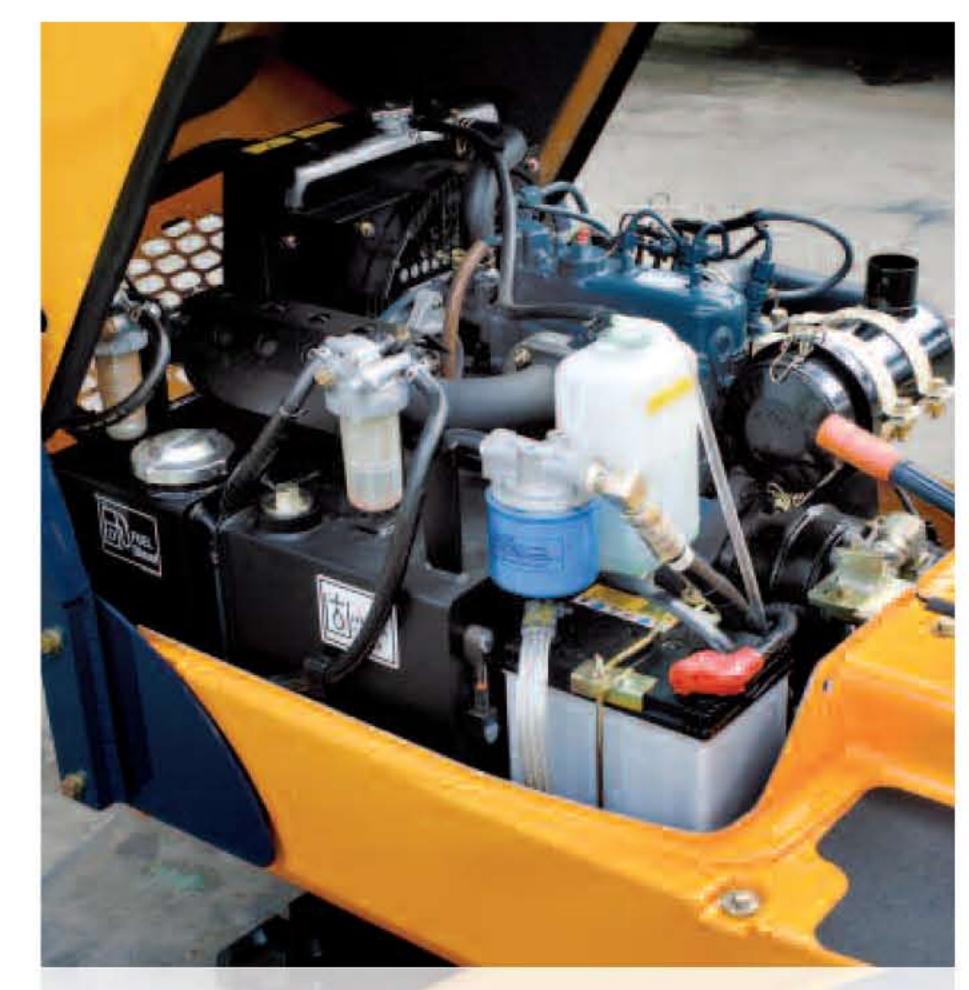

The Hanix H08B is less than 80cm wide and weighs just 760kg, making it ideal for towing and jobs in restricted areas.

The H08B can readily access any standard doorway and, when it's time to go to work, its hydraulically-operated tracks expand to 900mm to give enhanced stability for travelling and digging. Lightweight and manoeuvrable, it can cross surfaces with minimal ground compaction or impact on paved areas.

Improved Operator Comfort

- High seat position gives all round vision for greater safety.
- Fully adjustable operator's seat
- with seatbelt fitted as standard. Direct linked controls for greater
- operator sensitivity. All controls within easy reach.


Performance & Versatility

- Auxiliary lines and connectors fitted as standard.
- Good stability over rough and uneven ground.
- Hydraulically-operated expandable track gives the option of reaching small access areas or increasing stability for
- heavy loading. Generous ground clearance.

Functional Design

- Large service covers for easy access.
- Service points designed to reduce downtime; nipple guards fitted to protect grease points.
- Sealed travel motor for longer service life.
- Compact design allows machine to pass through a standard doorway and operate in restricted areas.

HINI EXCAVATORS

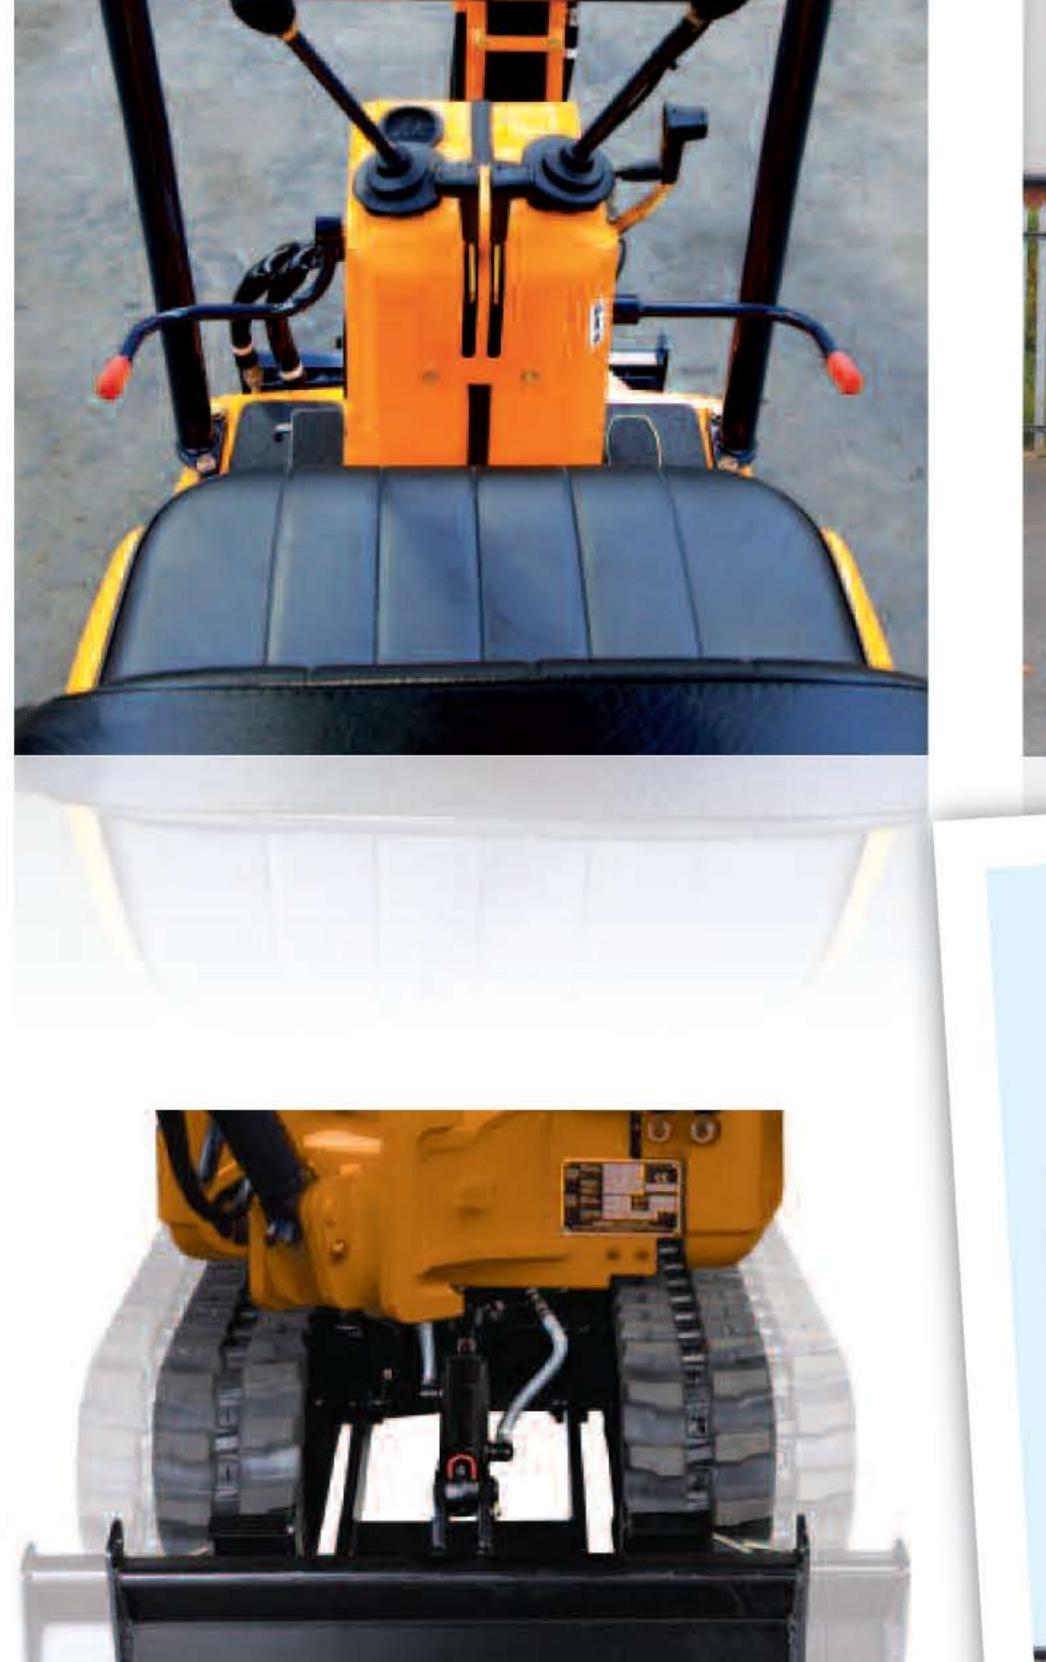



Better Performance

- Wider operating range and stronger breakout force with greater stability.
- Track and dozer blade extends to 900mm for enhanced stability.
- Good material handling over rough and uneven ground.
- Elevated seat position provides all-round vision and easy reach to all controls.